

WMF AG Coffee Machines International D-73312 Geislingen/Steige

Phone: +49 73 31 - 25 84 82 Fax: +49 73 31 - 25 87 92

professional@wmf.com · http://www.wmf.com

3025 # 63 8096 0391 Printed in Germany 04.11

MF

Auxiliary Units ... from professionals

for professionals





Contents

Cup & Cool	4 - 5
Cup Racks	6 - 7
Cooler	8 - 9
Dispenser I Filter	10-11
Mobile Stations	12-13
Additions	14-15

Freedom to combine and customise. Practically and flexibly.

For all your individual needs.



Narrow version of cup & cool, WMF bistro!, card reader, wide cup rack and WMF cafemat!



Narrow version of cup & cool, WMF presto!, WMF presto! F, narrow cup rack



Wide version of cup & cool, WMF presto!, coin checker, narrow cup rack, WMF presto! and coin checker



Narrow version of cup & cool, WMF prestolino! and coin checker



Cup dispenser on auxiliary cooler with the new WMF 2000 S and narrow cup rack

The product range combiNation comes with matching auxilary units.

Auxiliary cooler, WMF combiNation S4, cup & cool, WMF combiNation S, chocolate dispenser





CUP & COOL Cup Rack & Milk Cooler

wide 03 9019 0501



Optionally integrated with the cooler. Removable milk tank with 9.5 litre capacity

45 to 130 cups, mugs or glasses Safely regulated milk temperature due to thermostat 2 heated shelves made from coated stainless steel which is finger mark resistant Elegant styling in matching glass design Suitable for self-service operation 2 separate on / off switches for the cup rack (heated) and auxiliary cooler

Safety temperature switch for cup rack

- plug+clean integrated with cooler

- Illumination (pre-selected colours)

- 'milk empty' message (subject to specification of machine model)

0,2 kW Rated power Power supply 230 V Width 359 mm Height 530 mm Depth 531 mm Empty weight 35 kg

narrow

03 9019 0011



Removable milk tank with 4 litre capacity 45 to 190 cups, mugs or glasses

Safely regulated milk temperature due to thermostat

3 heated shelves made from coated stainless steel

which is finger mark resistant

Elegant styling in matching glass design Suitable for self-service operation

2 separate on / off switches for the

cup rack (heated) and auxiliary cooler

Safety temperature switch for cup rack

Optionally: - plug+clean integrated with cooler

- Illumination (pre-selected colours)

- 'milk empty' message (subject to specification

of machine model)

NEW plug+clean

Optionally

integrated with the

cooler.


0,2 kW Rated power Power supply 230 V 277 mm Width Height 533 mm Depth 528 mm Empty weight 34 kg

combiNation

03 9465 0001




Removable milk tank with 9.5 litre capacity 60-90 cups, mugs or glasses 2 heated shelves made from clear safety glass 2 separate on / off switches for the cup rack and auxiliary cooler Safety temperature switch for cup rack







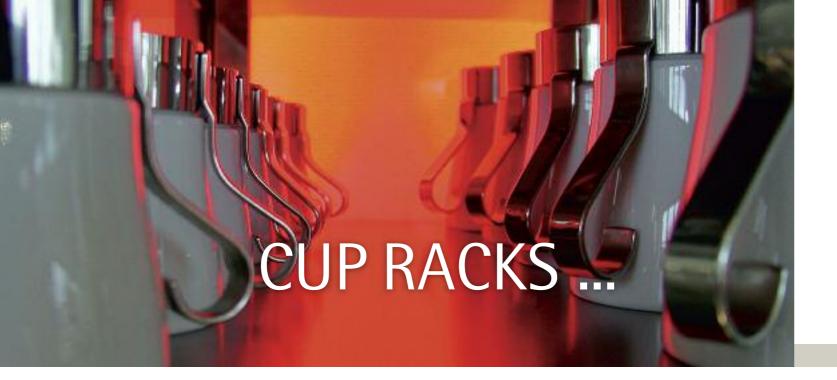

... they really stack up

w i d e03 9018 0501



88 to 320 cups, mugs or glasses
4 heated shelves made from coated stainless steel
which is finger mark resistant
Elegant styling in matching design
Suitable for self-service operation
On / off switch
Safety temperature switch
Optional illumination (pre-selected colours)

0,2 kW

359 mm

534 mm

524 mm

ca. 29 kg

Rated power

Power supply

Empty weight

Width

Height

Depth

n a r r o w03 9018 0011



60 to 260 cups, mugs or glasses
4 heated shelves made from coated stainless steel
which is finger mark resistant
Elegant styling in matching design
Suitable for self-service operation
On / off switch
Safety temperature switch
Optional illumination (pre-selected colours)

c o m b i N a t i o n



90 to 140 cups, mugs or glasses 3 heated shelves made from safety glass Elegant styling in matching design Suitable for self-service operation On / off switch (rear location option) Safety temperature switch

 Rated power
 0,2 kW

 Power supply
 230 V

 Width
 277 mm

 Height
 529 mm


 Depth
 524 mm

 Empty weight
 ca. 24 kg

Rated power 0,21 kW
Power supply 230 V
Width 350 mm
Height 604 mm
Depth 509 mm
Empty weight 25 kg



|7

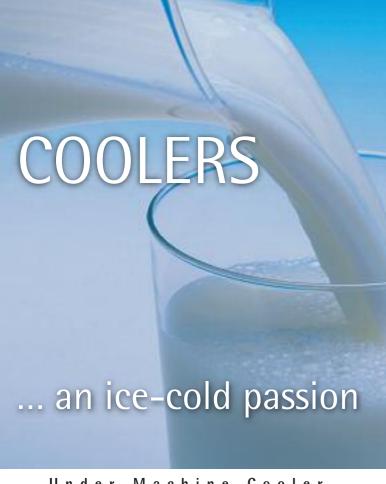

Under Machine Cooler wide

03 9468 0001



Under machine cooler for plenty of milk when space on the counter is limited Temperature adjustable from 2°-8°C

Removable milk tank with 9.5 litre capacity

Separate on / off switch

Milk hose neatly routed through the drip tray

For use with WMF bistro!

- 'Milk empty' message (subject to specification of machine model) Optionally:

- plug+clean and 'milk empty' message integrated with cooler
- lockable

Rated power 0,05 kW 462 mm Power supply 230 V Height 254 mm Empty weight 22 kg 537 mm

Auxiliary Cooler

03 9192 1001



Integrated cooler for automatic temperature control from 2°- 8°C

Removable milk tank with approx. 6.5 litres capacity

Separate on / off switch

- with 'milk empty' message (subject to specification of machine model)

- plug+clean and 'milk empty' message integrated with cooler

- lockable

Rated power 0,07 kW Width 231 mm Height 350 mm Power supply 230 V Empty weight 16,5 kg 534 mm

Under Machine Cooler narrow

03 9469 1001



Under machine cooler for plenty of milk when space on the counter is limited

Temperature adjustable from 2°-8°C

Power supply 230 V

Empty weight 22 kg

8

Removable milk tank with 9.5 litre capacity

Separate on / off switch, generally lockable

Milk hose neatly routed through the drip tray

for use with WMF presto! or WMF 2000 S (machine needs to be prepared)

Optionally: - 'Milk empty' message (subject to specification of machine model) - plug+clean and 'milk empty' message integrated with cooler

Rated power 0,05 kW 345 mm

Height

Depth

299 mm

533 mm

Auxiliary Cooler

03 9190 0001



Integrated cooler for automatic temperature control from 2°- 5°C Removable milk tank with approx. 3.5 litres capacity Separate on / off switch Generally lockable

Rated power 0,07 kW Width 227 mm Power supply 230 V Height 345 mm Empty weight 13,5 kg 469 mm Depth

Auxiliary Cooler

03 9469 3001



Auxiliary cooler for plenty of milk Temperature adjustable from 2°-8°C Removable milk tank with 9.5 litre capacity

Separate on / off switch, generally lockable

For use with WMF prestolino!, WMF presto!, WMF 2000 S or WMF bistro! Use of two coffee machines simultaneously is only possible with the WMF 2000 S

Optionally: - 'Milk empty' message (subject to specification of machine model)

Rated power 0,05 kW 333 mm Power supply 230 V Height 281 mm Empty weight 22 kg Depth 524 mm

Auxiliary Cooler combiNation 03 9460 0001



Cools up to 4 litres of milk Infinitely adjustable cooling system Removable milk tank Includes 2 chocolate sprinklers Generally lockable

Rated power 0,07 kW Width 250 mm Power supply 230 V Height 620 mm 563 mm Empty weight 32 kg Depth

Under Counter Cooler

03 9469 2001





Under counter cooler with 9.5 litre capacity

Temperature adjustable from 2°- 8°C

Removable milk tank

Separate on / off switch

For use with WMF combiNation S, E, WMF presto!,

WMF 2000 S or WMF bistro!

Optionally: - 'Milk empty' message (subject to specification of machine model)

- plug+clean and 'milk empty' message integrated with cooler

Rated power 0,05 kW Width 333 mm Power supply 230 V Height 281 mm Empty weight 22 kg Depth 524 mm

DISPENSER

... 'neatly dispensed'

with no drips ...or spills



Chocolate Dispenser

03 9420 1002 / 03 9410 1002 (self-service version)



Accurate chocolate powder portioning
Hourly output 140 cups
High-quality mixer ensures creamy consistency
Consistent quality and high performance
2 dispensing buttons for cup and mug or pot
Hopper capacity 2 kg
Self-service version with 1 button and lockable product hopper
Display (e.g. for 'empty' message)
Easy operating, cleaning and maintenance system

 Rated power
 2,2 kW

 Power supply
 230 V

 Width
 240 mm

 Height
 724 mm

 Depth
 465 mm

 Empty weight
 22 kg

Chocolate Dispenser combiNation



Accurate chocolate powder portioning
Hourly output 140 cups
High-quality mixer ensures creamy consistency
Consistent quality and high performance
Machine does not have an independent power and water supply
Designed for use only in conjunction with a coffee machine (combiNation F and S)
Standard version has 2 product dispensing buttons
Accounting, setting and error messages via coffee machine display
Coffee machine needs to be set up for use with the dispenser
(WMF combiNation S, E or F)
Optionally: - Lockable product hopper

Rated power 0,2 kW
Power supply 230 V
Width 250 mm
Height 804 mm
Depth 590 mm
Empty weight 25 kg

Tank Filter

33 2332 2000



WMF 1000!, WMF prestolino! and WMF presto!
coffee machines with water tank to reduce
scaling and improve water quality
Optimal flavour
Excellent coffee flavour – made with pure
water for consistent coffee quality
Extends the life of the high-quality
coffee machine components
Lower servicing and maintenance costs
Filters out, bonds, absorbs and reduces additives in water
Easy to install

Your WMF coffee machine calculates and displays, when it's time to change the filter

You should change the filter, when shown on the display and latest after 3 months

Grouts Separator

03 9011 0001



Simple, clean, fast, reliable solution for collection and disposal of coffee grouts
The grouts sensor causes a message to be displayed when the container is full
Includes a grouts collector

If connected to a WMF Programat GV, an additional assembly kit is necessary

Additional grouts containers can be ordered by quoting **03 9011 1001**

Capacity 12 litres
Height 579 mm
Width 314 mm
Depth 440 mm

WF

10



MOBILE STATIONS ... taking the coffee to your quests!



Mobile Coffee Station 9491 »wide«

Locate your coffee machine to suit your requirements
Independent of a fixed water supply and drain
Power supply required
2 lockable castors, 3 power supplies, minimum 2 pull-out trays

for storing coffee, cups, etc.

Space for one coffee machine with additional units such as cooler plus cup rack or a vending unit (e.g. coin checker) and with different water supply according to the coffee machine version



Mobile Coffee Station

Locate your coffee machine to suit your requirements Independent of a fixed water supply and drain Power supply required

2 lockable castors, 3 power supplies

Space for one coffee machine or one coffee machine alone or with cooler or a vending unit (e.g. coin checker) and with different water supply according to the coffee machine version

Rated power 3.0 kW
Power supply 230 V
Fresh water tank approx. 25 litres
Drain tank approx. 13 litres
Width 1,250 mm
Height 900 mm
Depth 780 mm

Rated power
Power supply
230 V
Fresh water tank
Presh wat



Mobile Coffee Station

Large shelf (772 mm x 685 mm)
Metal parts powder coated
in SilverDupont
Rugged steel frame
Large castors with adjustable
brake (dia. 125 mm)
Robust metal rail to protect
handle and edges
Various versions
Optionally with up to 3 slot-in trays







03 9171 0001

03 9171 2001

03 9171 10

03 9171 9001



Slot-in tray for use with the presto! mobile coffee station Empty weight 10 kg Extra convenience:

If equipped with illumination the coffee machine can be plugged into the multiple socket fixed to the steel frame

Technical Group

WMF bistro! / WMF cafemat! / WMF combiNation 03 9490 1000

Ideal for counter installation and locations without a water supply For up to 3 units with 230 V power supply



Rated power 0.2 kW
Power supply 230 V
Fresh water tank 25 litres
Drain tank 13 litres
Width 565 mm
Height 640 mm
Depth 635 mm

Technical Group WMF presto! / WMF 2000S

850 mm

970 mm

685 mm

32 - 45 kg

Height

Depth

WMF presto! / WMF 2000S 03 9492 1001

Ideal for counter installation and locations without a water supply
With empty message sensor
A water filter can be used
The WMF presto! requires a fixed water supply



Rated power 0.2 kW
Power supply 230 V
Fresh water tank 25 litres
Drain tank 13 litres
Width 565 mm
Height 640 mm
Depth 635 mm

External Tanks

WMF presto! 03 9492 0001 WMF 2000S 03 9492 0002

Ideal for counter installation and locations without water supply, especially for short-term operation; for example for events or locations with water supply deficient in lime (max. 5° dkH (carbonate hardness)). With empty message sensor. A water filter cannot be used.

WMF presto! requires tank option, 2000 S only in 230 V



Fresh water tank 25 litres Drain tank 13 litres Width 565 mm Height 640 mm Depth 320 mm

W_F

12

13



ADDITIONS



Jug Tray



Available as additional component to the cafemat!

Brewing arm allows various jug heights
to be filled

Height adjustable (in increments) jug tray is fitted with drip grate

Made from 18/10 stainless steel for easy cleaning and attractive appearance

Width 210 mm
Depth 185 mm
Min. clear height 167 mm
Max. clear height 380 mm

Paper Cup Dispenser



For stand-alone use or on top of the milk cooler 9192, Stackable (up to 3 cup dispensers) Applicable for 2 packs of paper cups with a length of 390 mm each For paper cups with Ø 60-90mm

 Width
 230 mm

 Height
 178 mm

 Depth
 500 mm

